





REVISION DATA				
SYM	ECN	DESCRIPTION	DATE	APPROVED

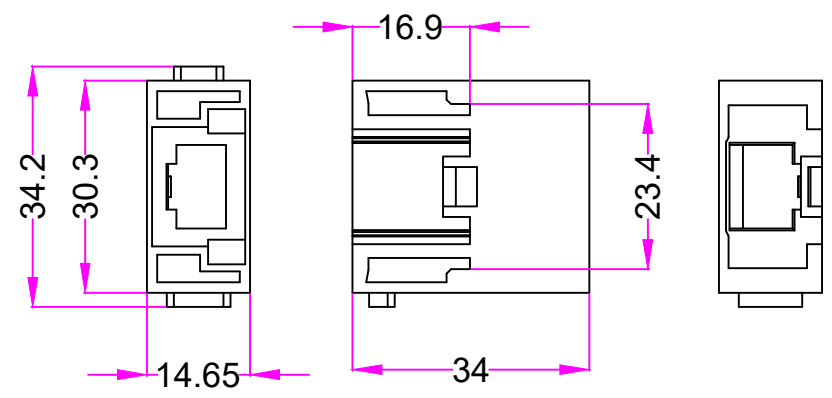

技术参数:
 插芯:
 插针数: 8
 额定电流: 1A
 额定电压: 50V
 额定脉冲电压: 0.8KV
 污染等级: 3
 传输特性: 超6类可达500MHz
 依据ISO/IEC 24 702:
 ISO/IEC 11 801
 传输速度: 10/100/1000Mbit/s
 绝缘阻抗: $\geq 10^{10} \Omega$
 材料: 聚碳酸酯
 温度范围: $-40^{\circ}\text{C} \sim +125^{\circ}\text{C}$
 依据UL 94的阻燃等级: V0
 可插拔次数: ≥ 500

Specifications:
 Inserts:
 No. of module: 8
 Rated current: 1A
 Rated voltage: 50V
 Rated impulse voltage: 0.8KV
 Pollution degree: 3
 Rated voltage acc. to UL: $< 30\text{V}$
 Transmission features: category 6/Class E
 up to 500MHz: acc.
 to ISO/IEC 24 702:
 ISO/IEC 11 801
 ransmission rate: 10/100/1000Mbit/s
 Insulatin resistance: $\geq 10^{10} \Omega$
 Material: polycarbonate
 Limiting temperatures: $-40^{\circ}\text{C} \sim +125^{\circ}\text{C}$
 Flammability acc. to (UL94): V0
 Mating cycles: ≥ 500



Tolerance		SIGNATURE	DATE	Units	mm	 宁波欧科瑞连接器有限公司 NINGBO OKERUI CONNECTOR CO.,LTD.	
0~ ≤ 20	± 0.15	DRAW		Size	A4		
20~ ≤ 50	± 0.25	DESIGN		Scale		PART NAME: HZW-RJ45-M	
50~ ≤ 80	± 0.35	CHECK		Sheet		Drawing NO.	REV
80~ ≤ 120	± 0.50	APPROVE		Proj.		Material	A