





REVISION DATA				
SYM	ECN	DESCRIPTION	DATE	APPROVED

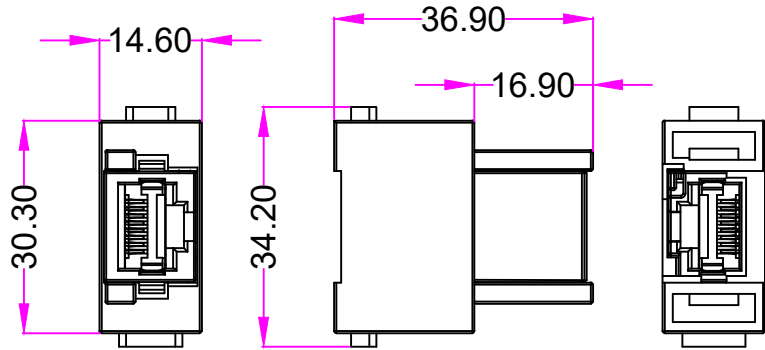

技术参数:  
 插芯:  
 插针数: 8  
 额定电流: 1A  
 额定电压: 50V  
 额定脉冲电压: 0.8KV  
 污染等级: 3  
 传输特性: 超6类可达500MHz  
 依据ISO/IEC 24 702:  
 ISO/IEC 11 801  
 传输速度: 10/100/1000Mbit/s  
 绝缘阻抗:  $\geq 10^{10} \Omega$   
 材料: 聚碳酸酯  
 温度范围:  $-40^{\circ}\text{C} \sim +125^{\circ}\text{C}$   
 依据UL 94的阻燃等级: V0  
 可插拔次数:  $\geq 500$

Specifications:  
 Inserts:  
 No. of module: 8  
 Rated current: 1A  
 Rated voltage: 50V  
 Rated impulse voltage: 0.8KV  
 Pollution degree: 3  
 Rated voltage acc. to UL: <30V  
 Transmission features: category 6/Class E  
 up to 500MHz: acc.  
 to ISO/IEC 24 702:  
 ISO/IEC 11 801  
 Transmission rate: 10/100/1000Mbit/s  
 Insulation resistance:  $\geq 10^{10} \Omega$   
 Material: polycarbonate  
 Limiting temperatures:  $-40^{\circ}\text{C} \sim +125^{\circ}\text{C}$   
 Flammability acc. to (UL94): V0  
 Mating cycles:  $\geq 500$



Tolerance		SIGNATURE	DATE	Units	mm	 宁波欧科瑞连接器有限公司 NINGBO OUKERUI CONNECTOR CO., LTD.	
0~ $\leq 20$	$\pm 0.15$	DRAW		Size	A4		
20~ $\leq 50$	$\pm 0.25$	DESIGN		Scale		PART NAME: HZW-RJ45-F	
50~ $\leq 80$	$\pm 0.35$	CHECK		Sheet		Drawing NO.	REV
80~ $\leq 120$	$\pm 0.50$	APPROVE		Proj.		Material	A